
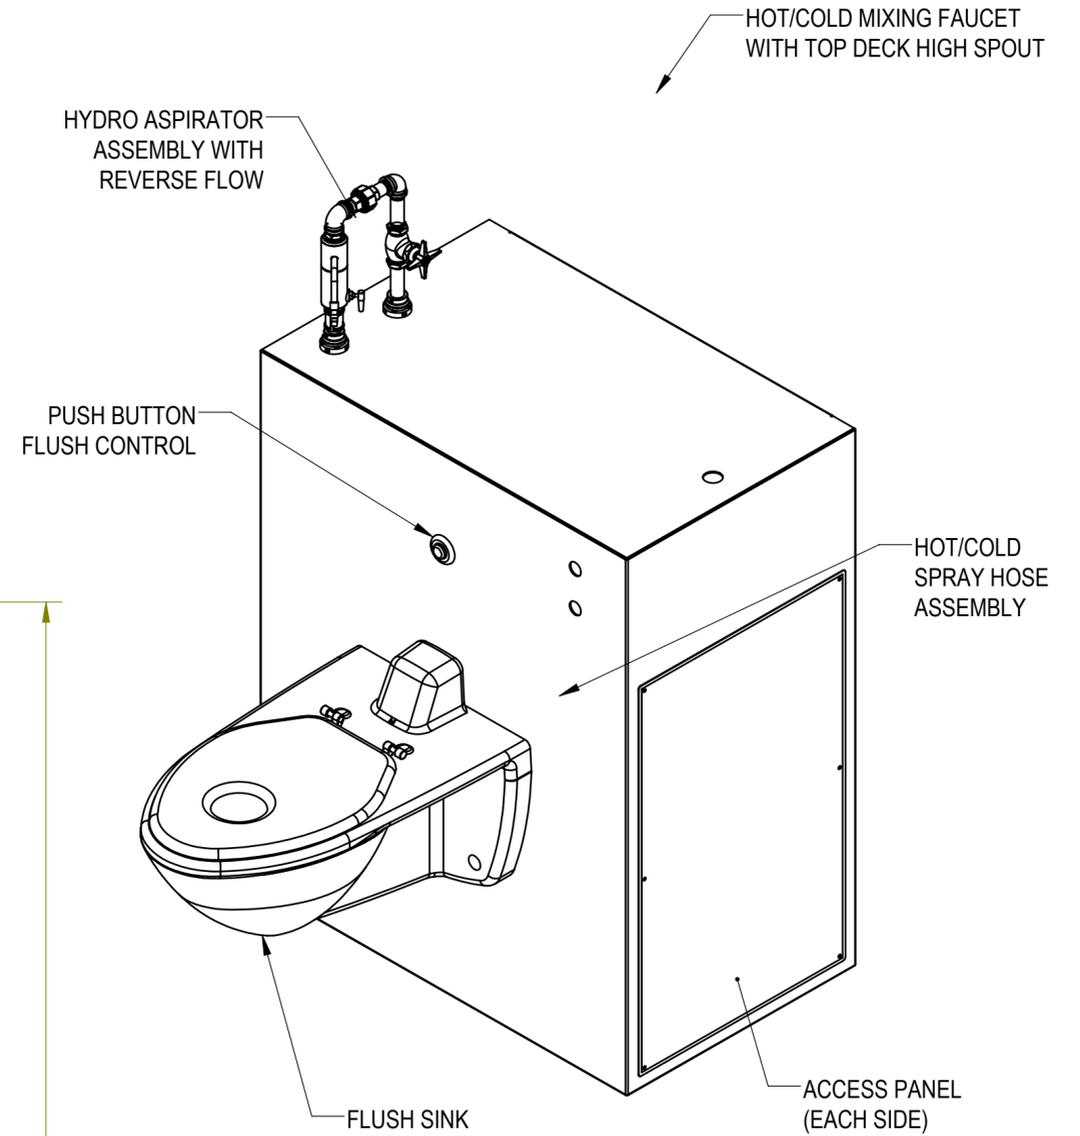
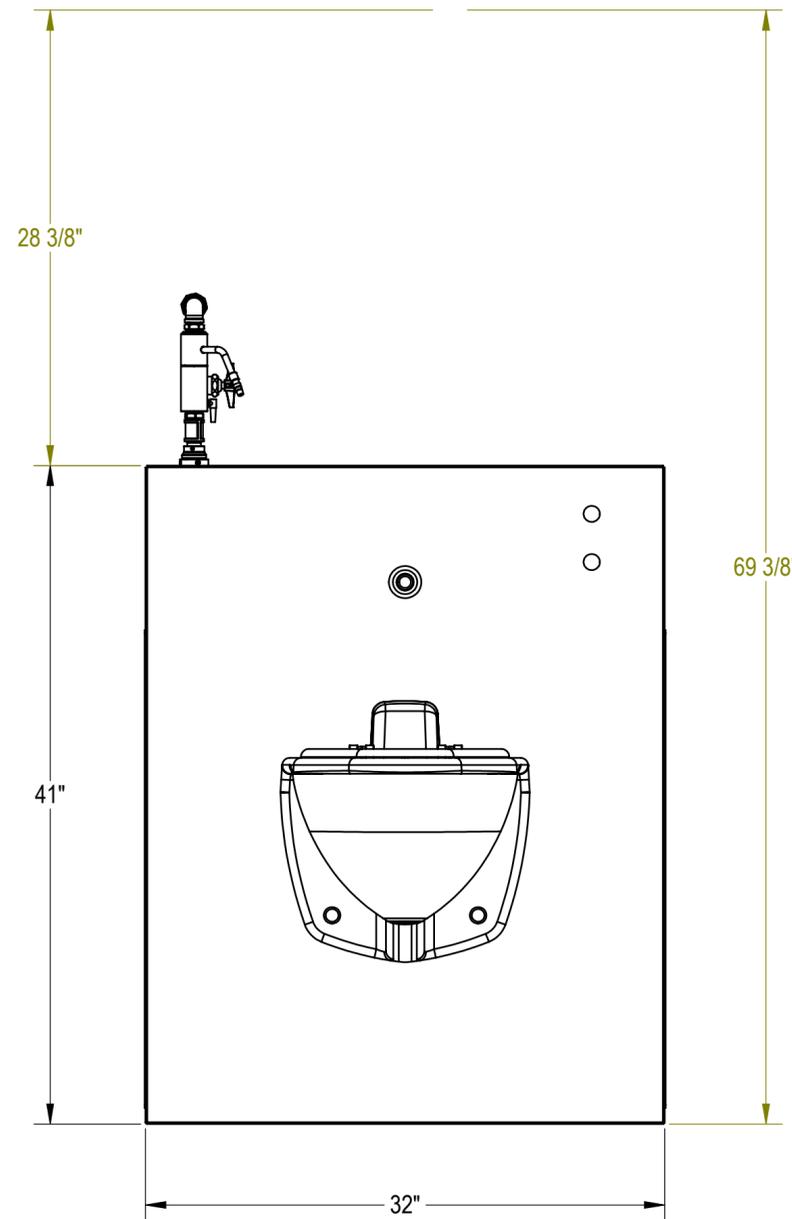


NOTES: UNLESS OTHERWISE SPECIFIED


1. APPLICABLE STANDARDS AND SPECIFICATIONS;
ANSI Y14.5M, DIMENSIONS AND TOLERANCES
ANSI Y1.1, ABBREVIATIONS

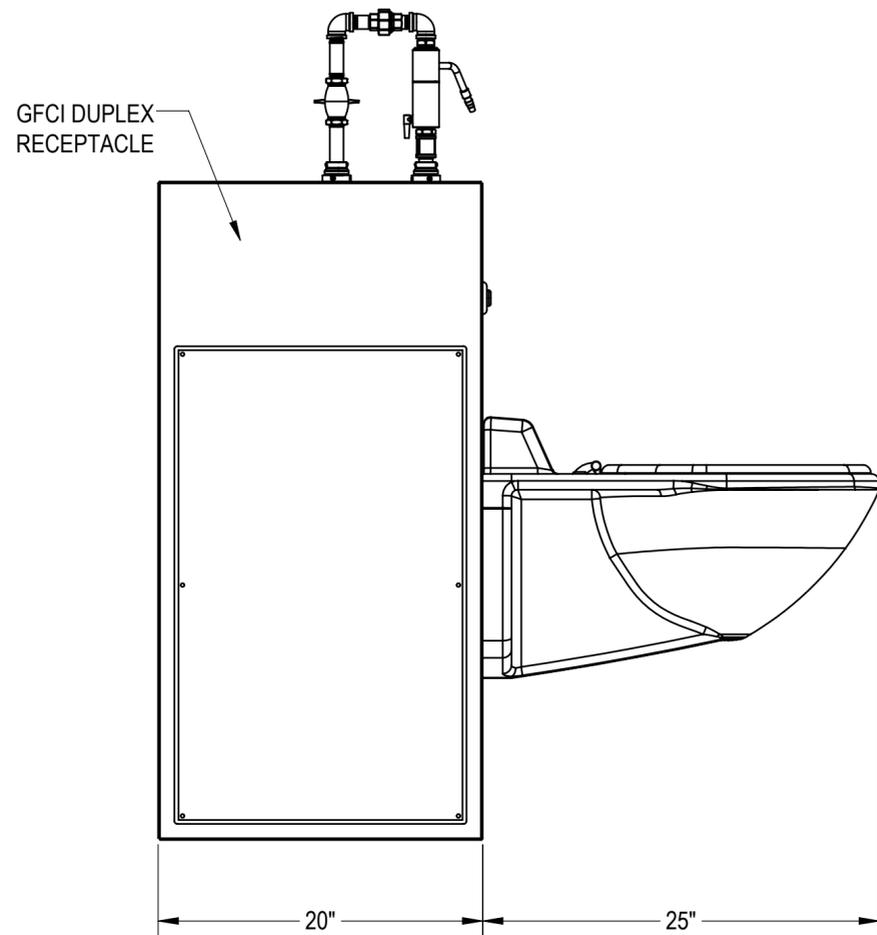

CUSTOMER		APPROVAL		<p style="text-align: center;">PROPRIETARY</p> <p style="text-align: center;">THIS DOCUMENT AND THE DATE DISCLOSED HEREIN AND HEREWITH IS NOT TO BE REPRODUCED, USED, OR OTHERWISE DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT WRITTEN AUTHORIZATION FROM MORTECH MFG.</p>					411 North Aerojet Avenue Azusa, CA 91702 tel: (800) 410-0100 (626) 334-1471 fax: (626) 334-1704 www.mortechmfg.com		
PROJECT		SIGNATURE					DATE		<p style="text-align: center;">MODEL 1036-13</p> <p style="text-align: center;">FLUSH STYLE EMBALMING STATION</p>		TITLE DWG NO. 1036-13AP REV. X01
				DO NOT SCALE DRAWING		APPROVALS		DATE		SCALE	
				MATERIAL		DRAWN BY		10/13/16		SIZE	
				FINISH		CHECKED BY		C		SCALE 1:8	
				APPROVED BY				SHEET 1 OF 3			

UTILITY REQUIREMENT NOTES:



1. FLUSH LINES CLEAR BEFORE CONNECTING TO STATION.
2. PLUMBER TO PROVIDE SHUT-OFF VALVES FOR WATER CONNECTIONS.
3. ELECTRICIAN TO PROVIDE LIQUID TIGHT JUNCTION BOX AND CONDUIT CONNECTIONS PER LOCAL CODES.
4. PROVIDE 58-60 LBS. WATER PRESSURE AND 4 GALLON PER MINUTE OF FLOW FOR PROPER OPERATION OF HYDRO ASPIRATOR.

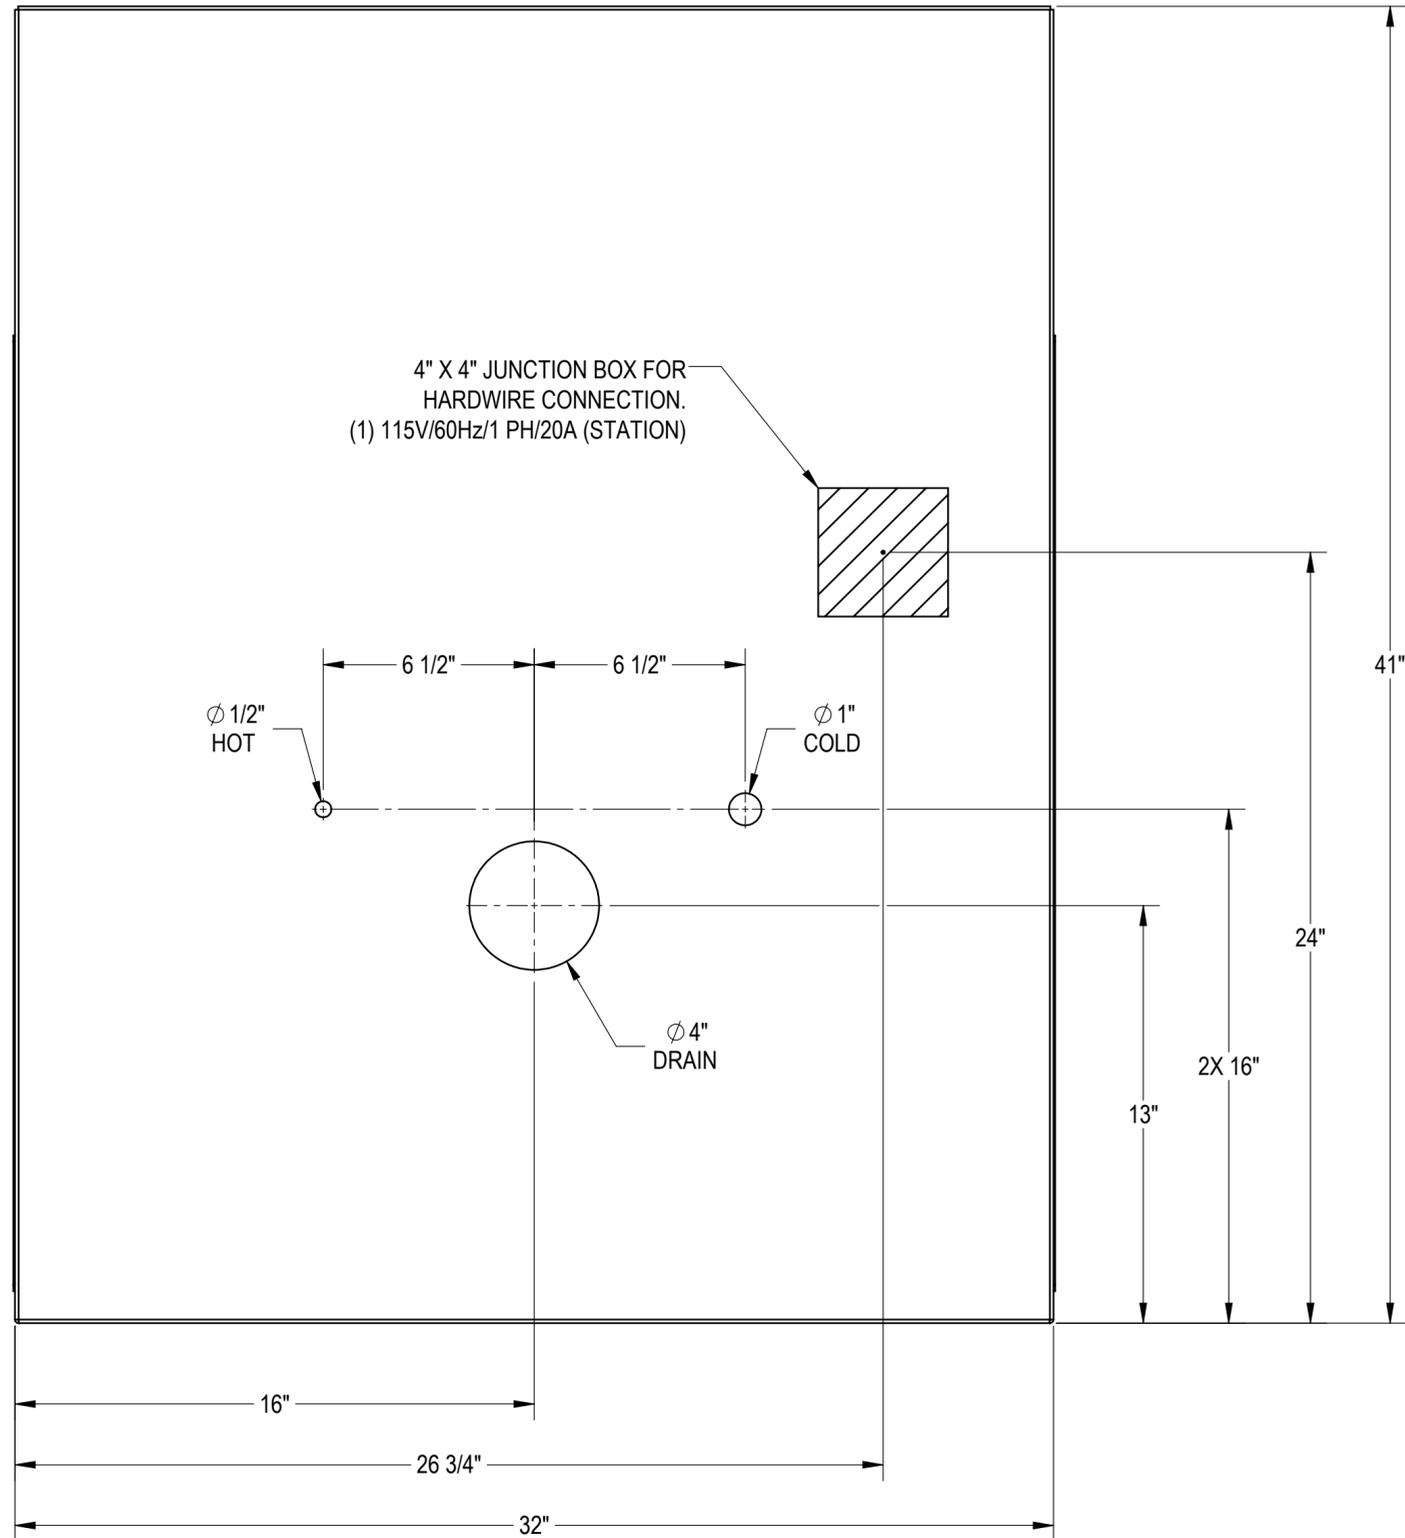

CUSTOMER		APPROVAL		<p style="text-align: center;">PROPRIETARY</p> <p style="text-align: center;">THIS DOCUMENT AND THE DATE DISCLOSED HEREIN AND HEREWITH IS NOT TO BE REPRODUCED, USED, OR OTHERWISE DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT WRITTEN AUTHORIZATION FROM MORTECH MFG.</p>					411 North Aerojet Avenue Azusa, CA 91702 tel: (800) 410-0100 (626) 334-1471 fax: (626) 334-1704 www.mortechmfg.com		
PROJECT		SIGNATURE					DATE		TITLE MODEL 1036-13 FLUSH STYLE EMBALMING STATION ROUGH-IN		REV. X01
				DO NOT SCALE DRAWING		APPROVALS		DATE		SIZE C	
				MATERIAL		DRAWN BY		10/13/16		DWG NO.	
				12 GA., 304 STAINLESS STEEL		GABRIEL G.				1036-13AP	
				FINISH		CHECKED BY		SCALE		1:4	
						APPROVED BY		SHEET		2 OF 3	

WALL MOUNTING NOTES:

1. Z-BAR SHIPPED WITHOUT MOUNTING HOLES FOR ADOPTION TO FIELD CONDITIONS. HOLES TO BE DRILLED BY INSTALLER.
2. INSTALL MINIMUM (3) UPPER ANCHORS.
FIRST HOLE: 1" IN FROM SIDE OF Z-BAR.
Z-BAR LENGTH: 27" LONG.
ADDITIONAL ANCHORS CAN BE ADDED AS NEEDED.
3. USE MINIMUM 1/4" TEK SCREWS 2 3/4" LONG. ADJUST LENGTH PER WALL THICKNESS.
4. ANCHORS USED MUST BE FLUSH TO Z-BAR AS MUCH AS POSSIBLE. THEY MUST NOT INTERFERE WITH PLUMBING BEHIND WALL.
5. THE LOWER ANCHORS ARE USED TO KEEP THE BOTTOM OF THE SINK FROM PULLING AWAY FROM THE WALL. THE Z-BAR HOLDS THE WEIGHT OF THE SINK.
6. INSTALLATION IS BASED ON ROUGH-IN MOUNTING DETAIL PROVIDED.

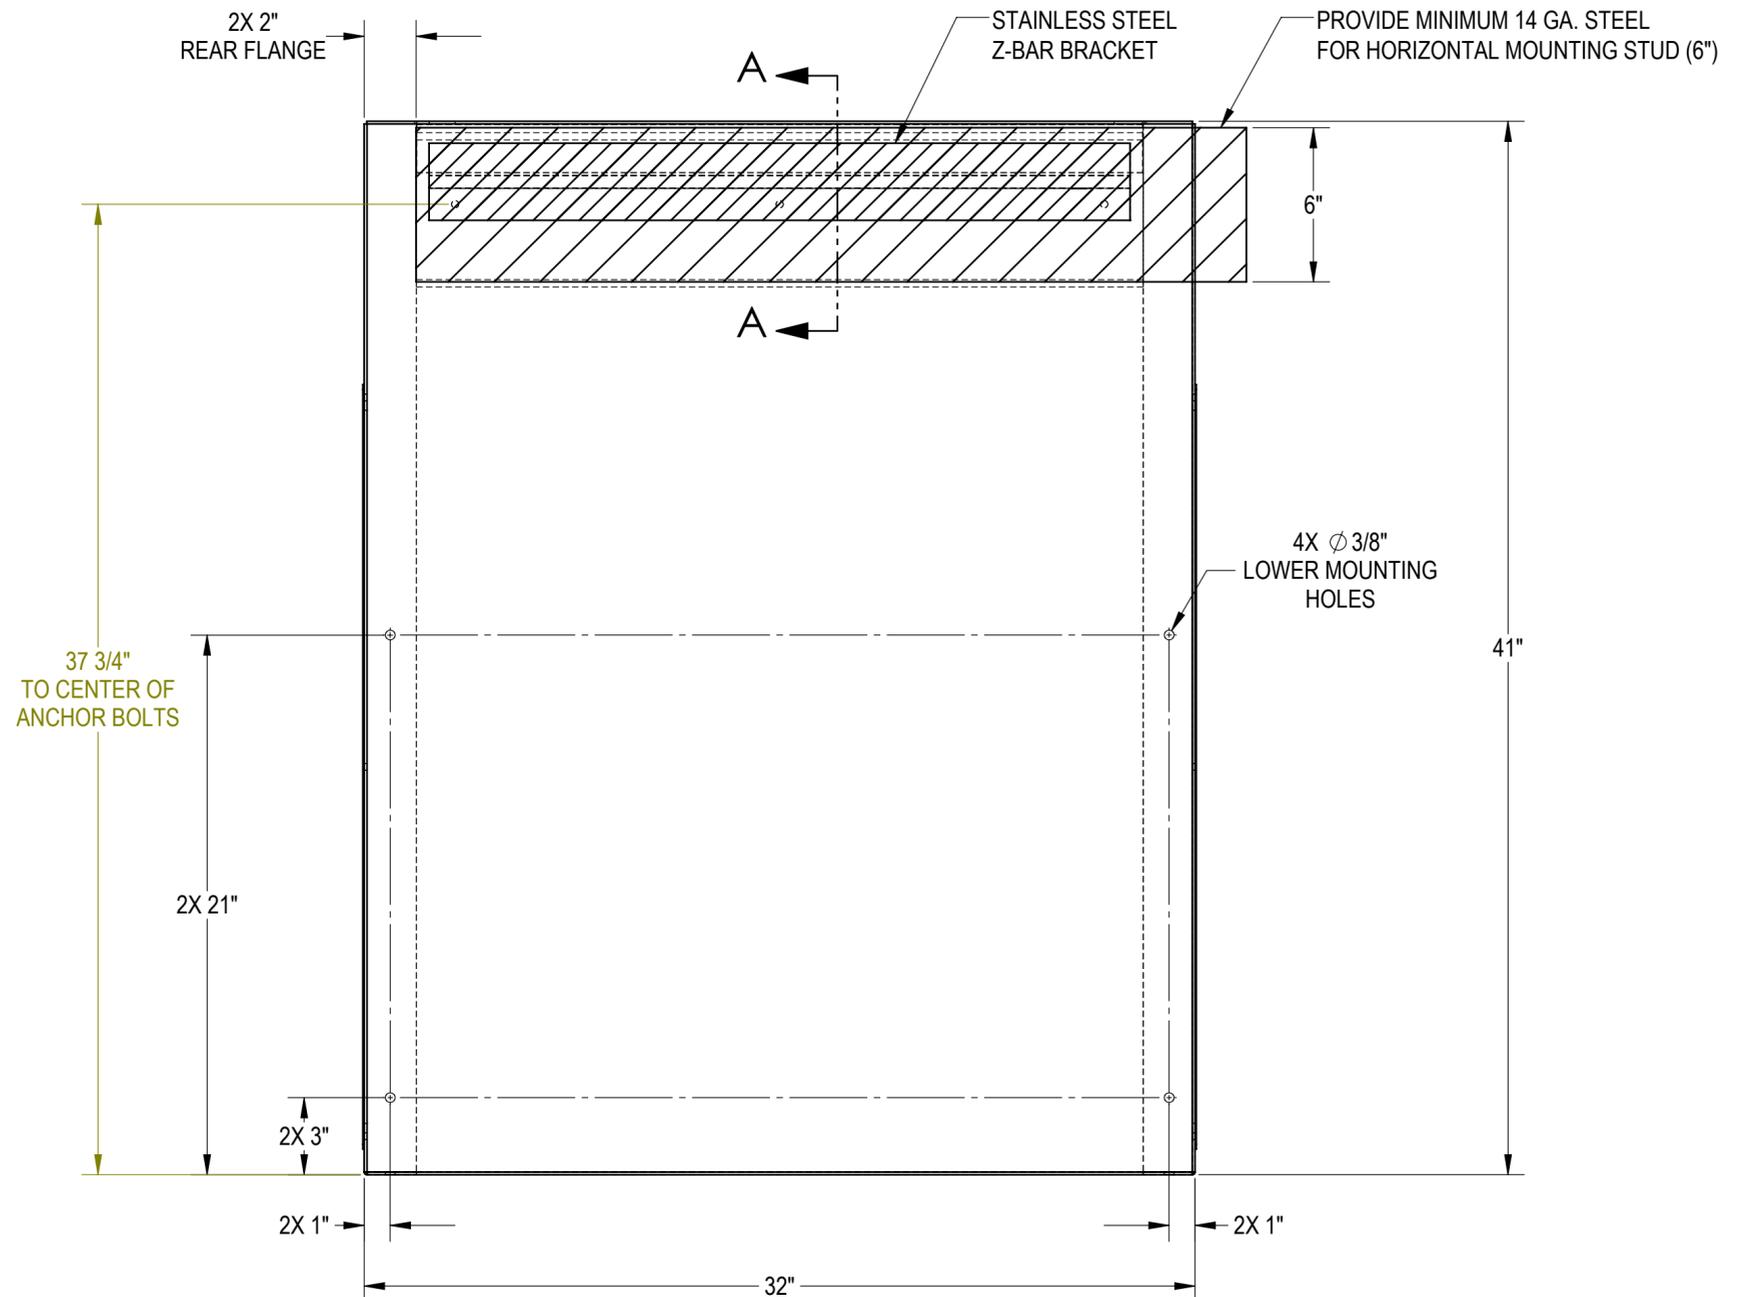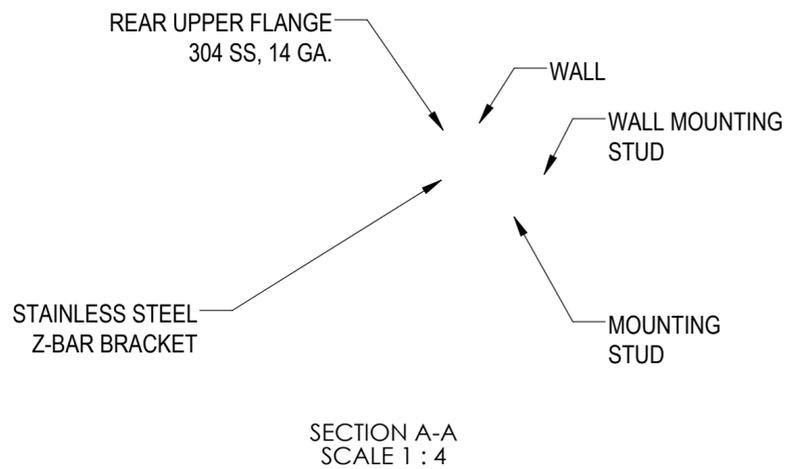

CUSTOMER	APPROVAL	PROPRIETARY			 411 North Aerojet Avenue Azusa, CA 91702 tel: (800) 410-0100 (626) 334-1471 fax: (626) 334-1704 www.mopecmfg.com
		THIS DOCUMENT AND THE DATE DISCLOSED HEREIN AND HEREWITH IS NOT TO BE REPRODUCED, USED, OR OTHERWISE DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT WRITTEN AUTHORIZATION FROM MORTECH MFG.			
PROJECT	SIGNATURE	DATE	DO NOT SCALE DRAWING	APPROVALS	DATE
			MATERIAL	CHECKED BY	
			12 GA., 304 STAINLESS STEEL	GABRIEL G.	10/13/16
			FINISH	APPROVED BY	
			SIZE	DWG NO.	REV.
			C	1036-13AP	X01
			SCALE	SHEET	OF
			1:5	3	3